


FLOWMETER DIMENSIONS	
DIM.	
	VFA VFB
A	4 [101.6] 6 1/2 [165.1]
B	3 [76.20] 5 1/2 [139.7]
	1/8 NPT CONN. 1/8 NPT CONN.
C	1 5/8 [41.28] 3 1/2 [88.90]
	10-32 THD. 10-32 THD.
D	1/2 [12.70] 1/2 [12.70]
E	1 3/16 [30.16] 1 1/2 [38.10]
F	1 1/4 [31.75] 1 1/4 [31.75]
**	2 1/16 [52.39] OPEN 2 1/16 [52.39] OPEN
**	4 3/32 [104.0] 6 11/16 [169.9]
L	1 [25.40] 1 3/8 [34.93]
***	7/8 [22.23] 7/8 [22.23]
***	1/8 NPT 1/8 NPT
***	3/32 [2.381] 3/32 [2.381]

- * - AS CAST PLASTIC THICKNESS $+1/16$
 $-3/32$
- ** - BV OR SSV MODELS ONLY.
- *** - EC MODELS ONLY.

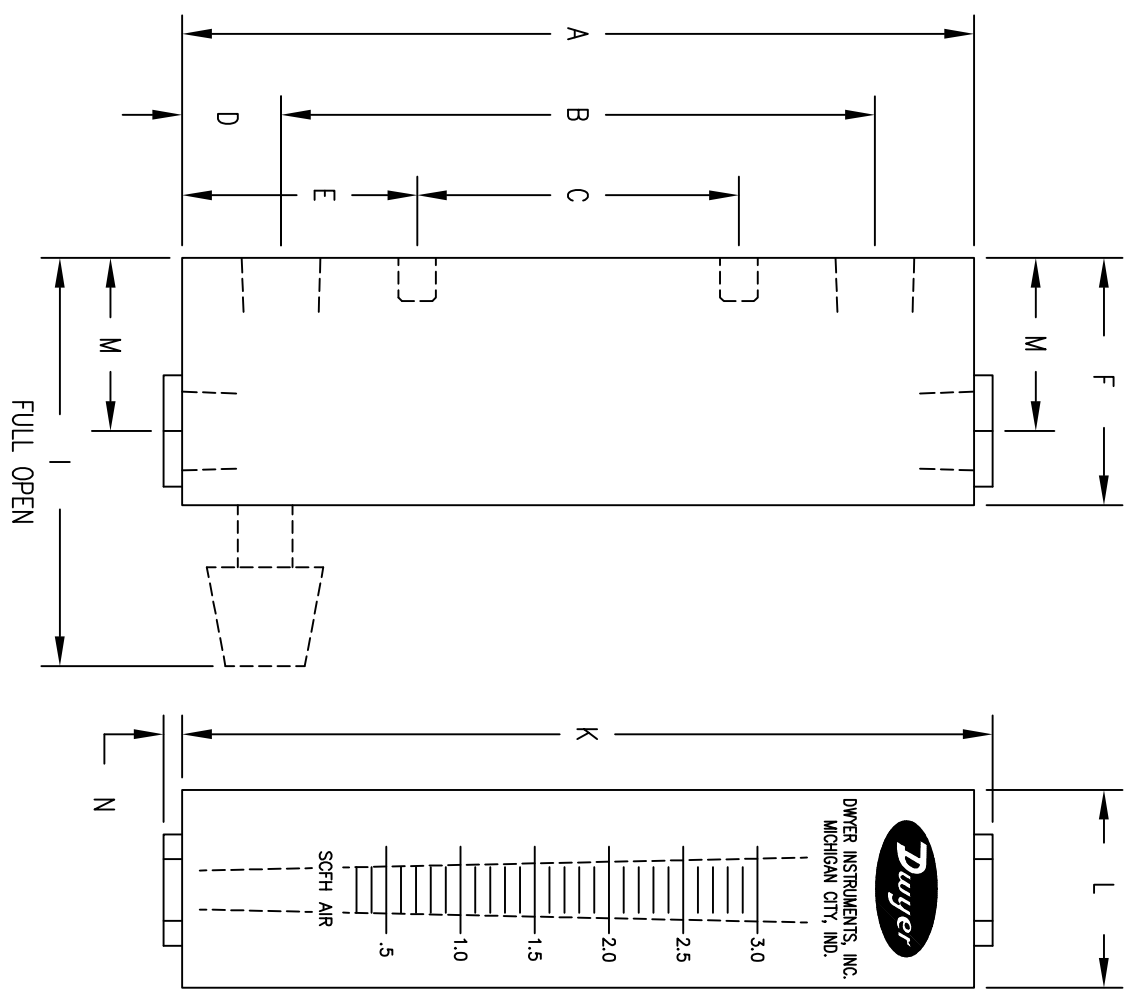

STANDARD TOLERANCES UNLESS NOTED:
 ALL FRACTIONAL DIMENSIONS $\pm 1/64$
 ALL DECIMAL DIMENSIONS $\pm .005$
 ALL ANGLES $\pm 1^\circ$

NO.	CHANGES	DATE	NAME	MATERIAL
		DWN BY		
		CHKD	VFA AND VFB SERIES FLOWMETER	FINISH
		APPD		
		BY/DATE	ACADR12	DWYER INSTRUMENTS, INC. MICHIGAN CITY, INDIANA 46360 U.S.A.
				FR. NO.

NOTICE: This drawing and the principles and elements of design embodied therein are the exclusive property of DWYER INSTRUMENTS, INC. and are not to be communicated, disclosed, reproduced or used except as previously authorized in writing by such corporation and must not be submitted to outside parties for examination without the written consent of said corporation.