

SERIES SVE

SOLENOID VALVE ENCLOSURES


For the Series RSV Remote Solenoid Valves




SVE06WP61



SVE06WP61

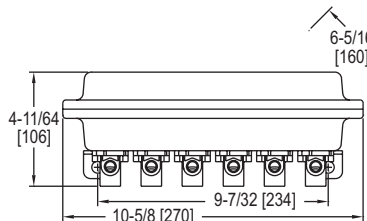

SVE06

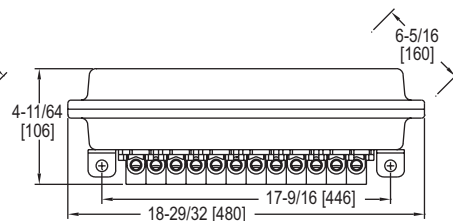

SVE12

The **Series SVE Solenoid Valve Enclosures** are multi-valve enclosures for the RSV pilot valve. The SVE offers a convenient weatherproof enclosure package with all solenoids pre-wired to a terminal block. Enclosures are available in 6 or 12 valve size with choice of pilot valve voltage.

FEATURES/BENEFITS

- Weatherproof enclosure
- Can order pre-wired to terminal block
- Available in 6 or 12 valve size

APPLICATIONS

- For use with RSV only, compatible gases

MODEL CHART

Model	Quantity of Solenoid	Enclosure Type	Voltage
SVE06WP61	6	Weatherproof	110 VAC
SVE06WP62	6	Weatherproof	220 VAC
SVE06WP63	6	Weatherproof	24 VDC
SVE12WP121	12	Weatherproof	110 VAC
SVE12WP122	12	Weatherproof	220 VAC
SVE12WP123	12	Weatherproof	24 VDC

SPECIFICATIONS

Service: (For RSV) Compatible gases, filtered and oil free.

Wetted Materials: (For RSV) Body: Aluminum; Core and spring: 304 SS; Seals: NBR.

Pressure Limits: (For RSV) Min of 4.4 psi (0.3 bar), max of 124.7 psi (8.6 bar).

Temperature Limits: Ambient: -4 to 122°F (-20 to 50°C); Operating: -4 to 185°F (-20 to 85°C).

Power Requirement: (For RSV) 110 VAC, 220 VAC, or 24 VDC.

Power Consumption: (For RSV) 12 W, inrush: 17 VA, holding: 14.5 VA.

Enclosure Rating: NEMA 4X (IP66).

Enclosure Material: Anodized aluminum with NBR gasket.

Electrical Connection: All RSV are pre-wired to a terminal strip.

Process Connection: (For RSV) 1/8" female NPT.

Conduit Connection: 3/4" female NPT.

Mounting Orientation: Any position.

Pneumatic Tube Length: Max of 9.8' (3 m).